

The "MAGNUM MODEL" Kinetic® Bullet Puller

For All Popular Rifle, Pistol, Rim or Rimless Center Fire Cartridges. (Not to be used on Rim Fire Cartridges or Explosive Projectile Ammunition.)

FEATURES THREE JAW CHUCK TO GRIP CARTRIDGE.

Tool's Specially Engineered Chuck Assembly* Evenly Grips, Holds Case Without Damage To Either Cannelure or Rim of Case.

* U.S. Pat. No. 3,646,661

The seller has made no affirmation of fact and has made no promise relating to the goods being sold, which has become any basis of the bargain made or has created or amounted to an express warranty that the goods would conform to any such affirmation or promise. Seller disclaims any warranty of merchantability with respect to being sold. Seller disclaims any warranty or fitness for any particular purposes whatsoever with respect to the goods being sold.

Quinetics Corp.

P.O. Box 29007

San Antonio, Texas 78229

Telex No. TWX 910-871-1168

**THE MOST ENERGY EFFICIENT
RELOADING TOOL AVAILABLE!**

INSTRUCTIONS FOR USE

- 1) Loosen cap until chuck inside of cap accommodates round for easy entry. Insert and rotate cartridge until chuck engages cartridge cannellure or comes into solid contact with rim or rimmed cartridge.
- 2) Tighten Bullet Puller cap.
- 3) Rap Bullet Puller against a hard, solid surface, cap end up, gripping handle mainly with thumb and forefinger. Remember, easier extraction results from handle shaft being parallel to the surface struck at the moment of impact. In this position, the cartridge cases is well aligned with the extraction force. Otherwise Bullet Puller plastic head will break.
- 4) Re-tighten cap after each rap

**PLEASE WEAR SAFETY
GLASSES WHILE USING
THIS PULLER**




KINETIC® BULLET PULLER REPLACEMENT PARTS

1. Hammer Body — \$9.35
2. Chuck Segments — ea. — \$2.20 (Complete, Set of 3 — \$6.60)
3. Chuck Assembly "O"ring — \$0.25
4. Cap — \$1.20

Quinetics Corp.

The Quinetics Automatic Multi-Caliber Shell Holder

* U.S. Pat. No. 3,916,758

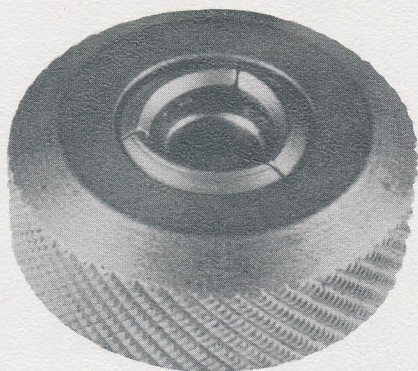

Adjusts automatically to the case size.
Accommodates 71 different calibers in a
cartridge case size range that includes all the
popular "old timers".

**THIS SINGLE SHELL HOLDER WILL TAKE CARE OF YOUR
ENTIRE RELOADING RANGE, RIFLE AND PISTOL. NO NEED
TO BUY OTHER HOLDERS.**

Guaranteed for a full 10 years against breakage and normal wear.

Quinetics Corp.

P. O. Box 29007

San Antonio, Texas 78229

Telex No. TWX 910-871-1168

NOTE: If Cartridge Is Ever Stuck In The Die:

Insert shell holder into ram making sure jaws are completely open. Raise ram until contact with bottom of die, locking jaws of the shell holder around stuck cartridge, then lower ram with stuck cartridge and remove from shell holder.

ANY PRECISION INSTRUMENT REQUIRES TECHNIQUE AND UNDERSTANDING FOR
EFFICIENT OPERATION.

Operation Instructions for the Automatic Multi-Caliber SHELL HOLDER

1. Insert the Quinetics Shell Holder into loading tool ram, secure holder in ram in usual manner.
2. Raise loading tool ram to maximum up position, adjust die to contact shell holder, reverse die one fourth turn.
3. Insert cartridge case that is to be processed into shell holder.
4. Raise ram of loading tool, being sure that cartridge case enters die in proper manner.
5. Continue loading tool ram's upward movement until case has entered die to proper depth. Readjust die if necessary to assure the "cam action" snaps gently over "center". Lock die in place.
6. Lower ram to complete down position, twirl cartridge case with fingers until chuck releases cases (approximately one-third revolution and back). Tilt case to remove from Holder.
7. Repeat operations No.s 3, 4, & 6.